

KYNAR® 740

Kynar® resins are fluorinated thermoplastic homopolymers.

Outstanding characteristics: chemical resistance, imperviousness to UV, high barrier properties, high purity, good mechanical and thermo-mechanical properties.

Kynar® 740 resin is a standard grade of granules for extrusion of tubes and plaques, compression and transfer molding. This product is **NSF/ANSI/CAN 61** certified.

A powder form is available as **Kynar® 741 resin**.

PROPERTIES	VALUE	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	1.1	cm ³ /10 min	ISO 1133
Temperature	230	°C	-
	446	°F	-
Load	5	kg	-
	11	lb	-
Melt Flow Rate	1.5 - 3	g/10min	ASTM D1238
Temperature	230	°C	-
Load	5	kg	-
Molding Shrinkage, parallel	2.0	%	ISO 294-4, 2577
Molding Shrinkage, normal	2.0	%	ISO 294-4, 2577
Melt Viscosity, 230°C, 100 s ⁻¹	16 - 22	kPoise	ASTM D3835
MECHANICAL PROPERTIES			
Tensile Modulus	1700	MPa	ISO 527-1/-2
	247000	psi	
Tensile Modulus, 73 °F	1380 - 2310	MPa	ASTM D638
	200000 - 335000	psi	
Yield Stress	50	MPa	ISO 527-1/-2
	7250	psi	
Tensile Strength at Yield, 73 °F	44.8 - 55.2	MPa	ASTM D638
	6500 - 8000	psi	
Yield Strain	7	%	ISO 527-1/-2
Elongation at Yield, 73 °F	5 - 10	%	ASTM D638
Nominal Strain at Break	>50	%	ISO 527-1/-2
Tensile Strength at Break, 73 °F	34.5 - 55.2	MPa	ASTM D638
	5000 - 8000	psi	

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SDC/11-2018
 Source: automatically generated TDS from Material Database on 12-08-2024

KYNAR[®]

740

Elongation at Break, 73 °F	20 - 100	%	ASTM D638
Taber Abrasion, CS 17 1000g:pad	5 - 9	mg/1000 cycles	ASTM-G195-13A
Hardness, Shore D, 73 °F	76 - 80	-	ASTM D2240
Flexural Modulus, 73 °F	1380 - 2310	MPa	ASTM D790
	200000 - 335000	psi	
Flexural Strength @ 5% Strain, 73 °F	58.6 - 75.8	MPa	ASTM D790
	8500 - 11000	psi	
Compressive Strength, 73 °F	68.9 - 103	MPa	ASTM D695
	10000 - 15000	psi	
Tensile Creep Modulus, 1h	1050	MPa	ISO 899-1
	152000	psi	
Tensile Creep Modulus, 1000h	570	MPa	ISO 899-1
	82700	psi	
Charpy Impact Strength, +23°C	244	kJ/m ²	ISO 179/1eU
	116	ftlb/in ²	
Charpy Impact Strength, -30°C	186	kJ/m ²	ISO 179/1eU
	88.5	ftlb/in ²	
Charpy Notched Impact Strength, +23°C	14	kJ/m ²	ISO 179/1eA
	6.66	ftlb/in ²	
Charpy Notched Impact Strength, -30°C	5	kJ/m ²	ISO 179/1eA
	2.38	ftlb/in ²	
Unnotched Impact Strength, 73 °F	1.07 - 4.27	kJ/m	ASTM D256
	20 - 80	ftlb/in	
Notched Impact Strength, 73 °F	0.0961 - 0.214	kJ/m	ASTM D256
	1.8 - 4	ftlb/in	
Coefficient of Friction, Static vs. Steel, 73 °F	0.2	-	ASTM D1894
Coefficient of Friction, Dynamic vs. Steel, 73 °F	0.14	-	ASTM D1894
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	168	°C	ISO 11357-1/-3
Melting Point	165 - 172	°C	ASTM D3418
Glass Transition Temperature, 10°C/min	-40	°C	ISO 11357-1/-2
Glass Transition Temperature (Tg)	-40.6 - -38.3	°C	ASTM D7028
	-41 - -37	°F	
Temperature Rating	150	°C	UL RTI
	302	°F	

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SDC/11-2018
 Source: automatically generated TDS from Material Database on 12-08-2024

KYNAR® 740

Temp. of Deflection Under Load, 1.80 MPa	105	°C	ISO 75-1/-2
	221	°F	
Heat Deflection Temperature, 264 Psi, 248 °F/hr	105 - 115	°C	ASTM D648
	221 - 239	°F	
Temp. of Deflection Under Load, 0.45 MPa	135	°C	ISO 75-1/-2
	275	°F	
Heat Deflection Temperature, 66 Psi, 248 °F/hr	125 - 140	°C	ASTM D648
	257 - 284	°F	
Vicat Softening Temperature, 50°C/h 50N	135	°C	ISO 306
	275	°F	
Coeff. of Linear Thermal Expansion, parallel	150	E-6/K	ISO 11359-1/-2
Coefficient of Thermal Expansion, 73 °F	11.9 - 14.4	10E-5/ °C	ASTM D696
	6.6 - 8	10E-5/ °F	
Burning Behav. at 1.5 mm Nominal Thickness	V-0	class	IEC 60695-11-10
Thickness Tested	1.6	mm	-
	0.0630	in	
Yellow Card available	yes	-	-
Burning Behav. at Thickness h	V-0	class	IEC 60695-11-10
Thickness Tested	0.8	mm	-
	0.0315	in	
Oxygen Index	43	%	ISO 4589-1/-2
Limiting Oxygen Index	44	%	ASTM D2863
Thermal Conductivity	0.17 - 0.19	W/(m K)	ASTM D433
	1.18 - 1.32	BTU in /hr ft ² K	
Specific Heat	745 - 958	J/(kg K)	DSC
	0.28 - 0.36	BTU/(l b·°F)	
Thermal Decomposition TGA, in air	375	°C	1% wt. loss
	707	°F	
Thermal Decomposition TGA, in nitrogen	410	°C	1% wt. loss
	770	°F	
Relative Thermal Index, Mechanical	150	°C	UL 746B
	302	°F	
Relative Thermal Index, Electrical	150	°C	UL 746B
	302	°F	

ELECTRICAL PROPERTIES

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SDC/11-2018
 Source: automatically generated TDS from Material Database on 12-08-2024

KYNAR® 740


Relative Permittivity, 100Hz	11	-	IEC 60250
Relative Permittivity, 1MHz	8	-	IEC 60250
Dielectric Constant, 1 kHz	4.5 - 9.5	-	ASTM D150
Dissipation Factor, 100Hz	260	E-4	IEC 60250
Dissipation Factor, 1MHz	2310	E-4	IEC 60250
Dissipation Factor, 100 kHz	0.01 - 0.21	-	ASTM D150
Volume Resistivity	2E12	Ohm* m	IEC 62631-3-1
Volume Resistivity, DC 68 °F, 65% R.H.	2E14	Ohm*c m	ASTM D257
Surface Resistivity	>1E15	Ohm	IEC 62631-3-2
Dielectric (Electric) Strength	21	kV/mm	IEC 60243-1
	533	kV/in	
Dielectric (Electric) Strength, 73°F	1.7	kV/mil	ASTM D149
Comparative Tracking Index	600	-	IEC 60112
OTHER PROPERTIES			
Water Absorption, 23°C, immersion, equilibrium	0.03	%	ISO 62
Water Absorption	0.01 - 0.03	%	ASTM D570
Humidity Absorption, 23°C, RH50%, equilibrium	0.015	%	ISO 62
Density	1780	kg/m ³	ISO 1183
	1.78	g/cm ³	
Specific Gravity, 73 °F	1.77 - 1.79	-	ASTM D792
OPTICAL PROPERTIES			
Refractive Index @ sodium D line	1.42	-	ASTM D542

MAIN APPLICATIONS:


- corrosion protection in the chemical industry
- coating (painting, co-extrusion)
- off-shore
- wire and cable

DIAGRAMS


VISCOSITY-SHEAR RATE

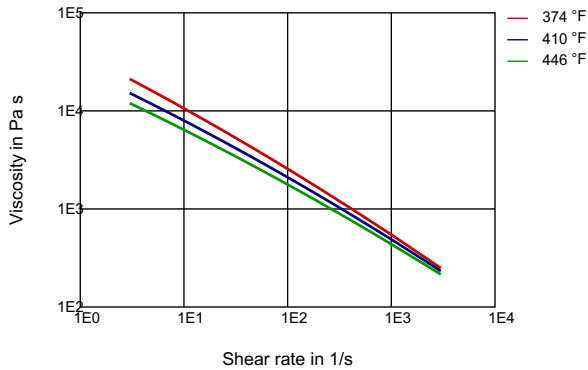


SHEARSTRESS-SHEAR RATE

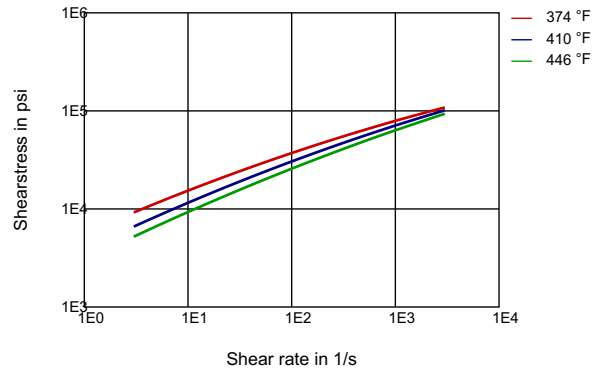

STRESS-STRAIN

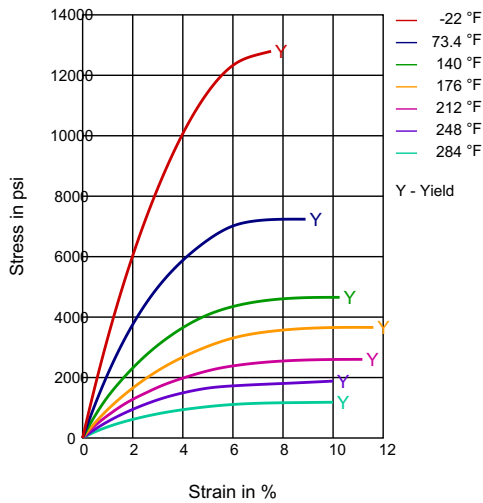


SECANT MODULUS-STRAIN

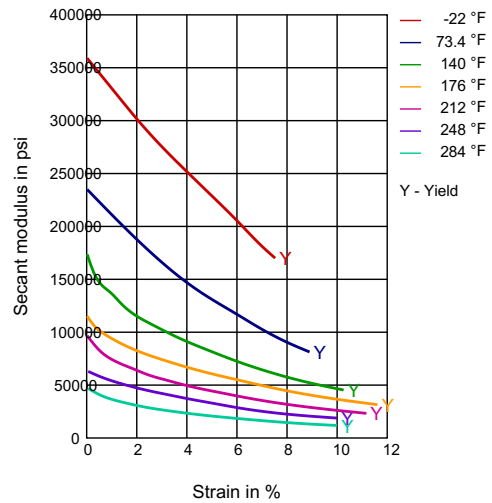

KYNAR[®] 740

SPECIFIC VOLUME-TEMPERATURE (PVT)

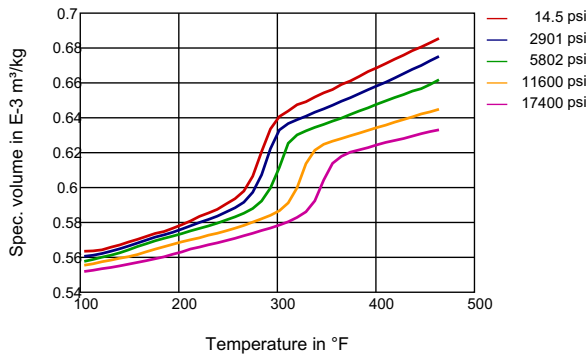

<p>PROCESSING</p> <p>Profile Extrusion, Sheet Extrusion, Other Extrusion, Transfer Molding, Thermoforming</p>	<p>Headquarters:</p> <p>Arkema France 420 rue d'Estienne d'Orves 92705 Colombes Cedex France T +33 (0)1 49 00 80 80 hpp.arkema.com</p>
<p>DELIVERY FORM</p> <p>Pellets</p>	
<p>REGIONAL AVAILABILITY</p> <p>North America, Europe, Asia Pacific, South and Central America, Near East/Africa</p>	<p>Arkema Inc. – High Performance Polymers</p> <p>900 First Avenue King of Prussia, PA 19406 Tel.: +1 610 205 7000 hpp.arkema.com</p>

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, ARKEMA expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.